




## HWZ(135/155/175/200) POSITIVE CIRCULATION DRILLING RIG

The small track positive circulation drilling rig is mainly used for engineering dewatering wells, agricultural wells, and geothermal drilling. It has the advantages of compact structure, fast footage, flexible and efficient. Lightweight and compact, fast hole forming speed, about 30 meters per hour, low noise, single person can complete the operation, the machine self-unloads the drill rod, the average removal of the 100-meter drill rod takes 10 minutes, easy to move, after completing drilling, start the diesel engine You can complete the shift.

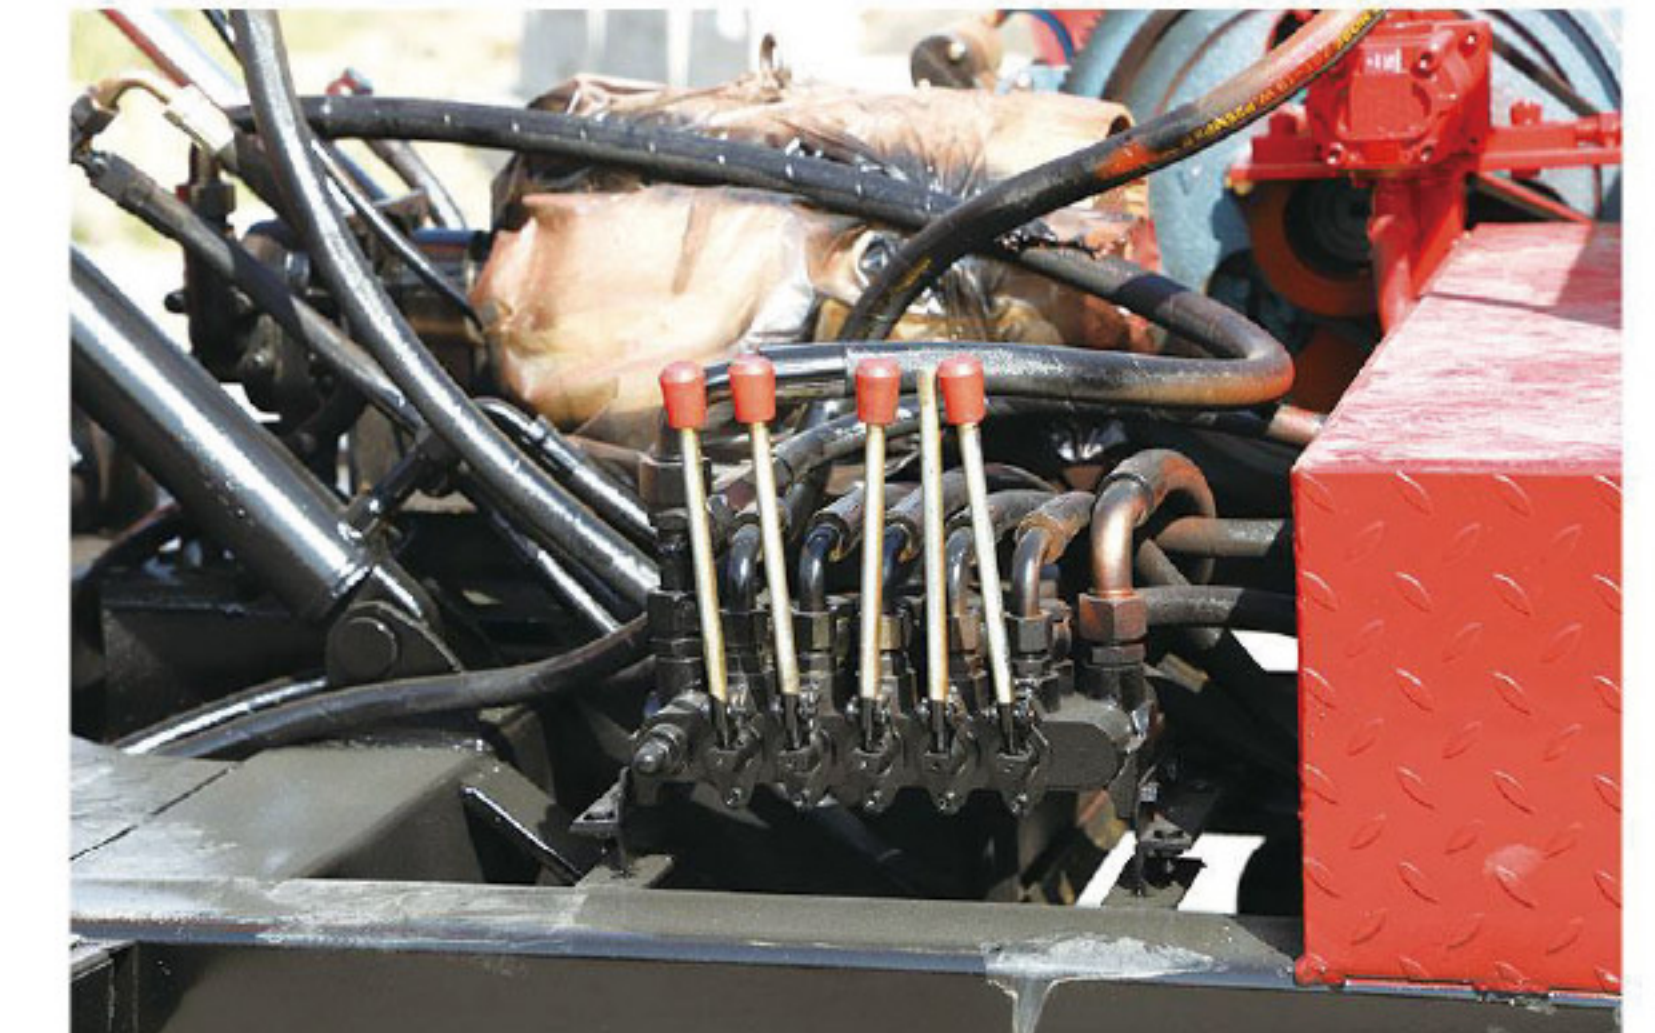

### Main technical parameters

Model	HWZ-135	HWZ-155	HWZ-175	HWZ-200
Machine weight (kg)	2500	2800	3000	3400
Machine size (m)	3.3*1.8*2.7	3.3*1.8*2.8	3.3*1.8*2.8	3.3*1.8*2.8
Drill pipe diameter(mm)	50/60	50/60/73	60/73/89	73/90
Engine power(kw)	7.5	11	15	18.5
Height of tower crane(m)	8	8	8	8
Hoisting weight(T)	4.5	4.5	4.5	4.5
Hydraulic motor(kw)	5.5/7.5	5.5/7.5	5.5/7.5	5.5/7.5
Drilling diameter(mm)	50-800	50-1000	50-1300	50-1500
Drilling depth(m)	10-150	10-160	10-160	10-160